



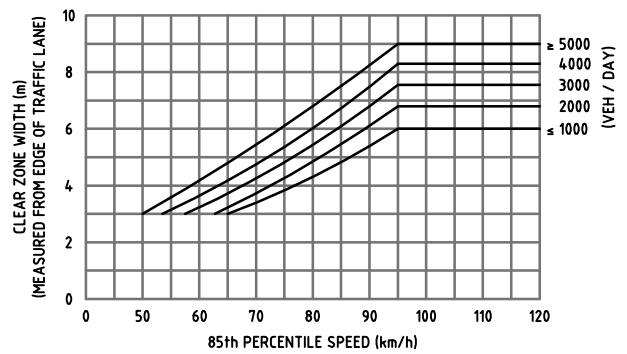


TYPICAL CLEAR ZONE WIDTHS

(REFER NOTE 8)

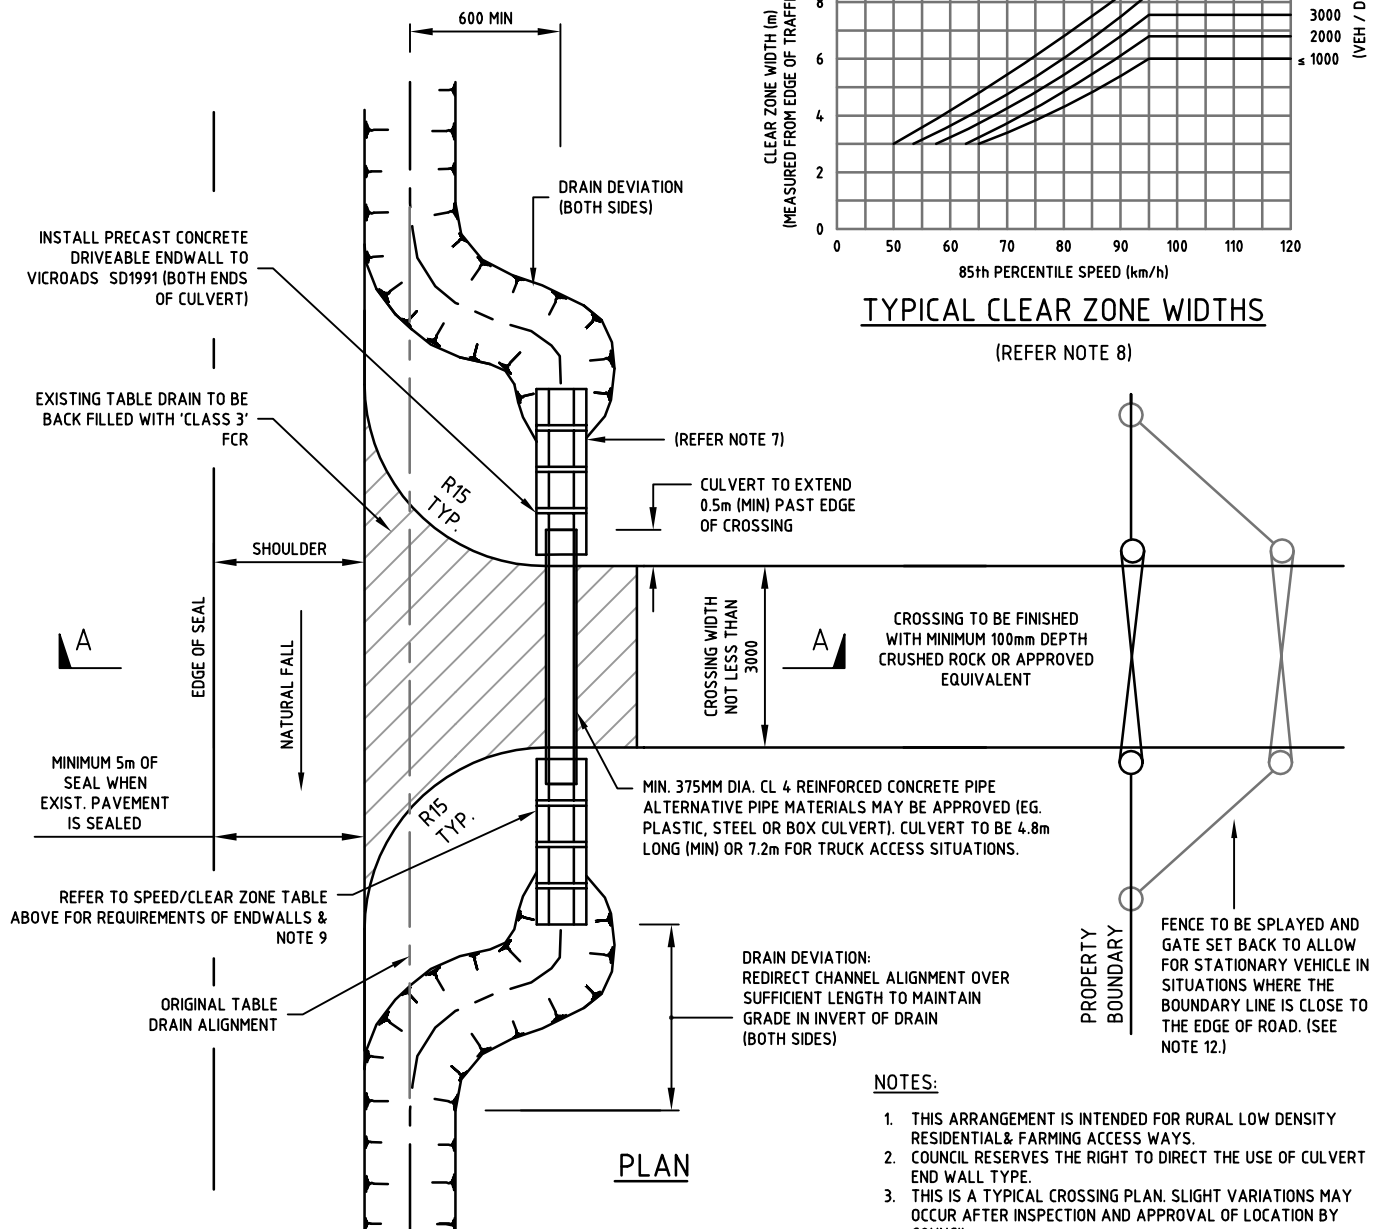

PLAN

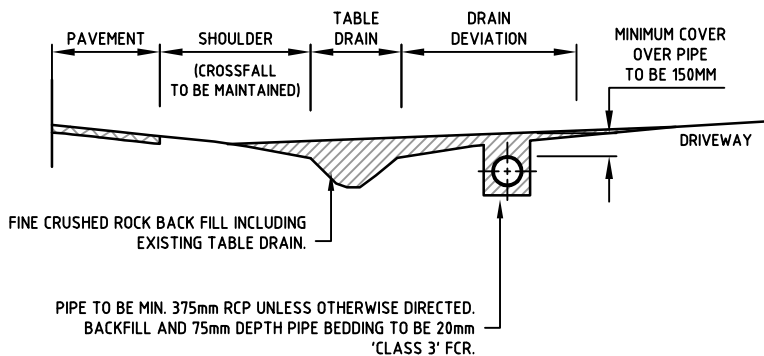

SECTION A-A

ALL MEASUREMENTS IN MILLIMETRES

NOTES:

1. THIS ARRANGEMENT IS INTENDED FOR RURAL LOW DENSITY RESIDENTIAL & FARMING ACCESS WAYS.
2. COUNCIL RESERVES THE RIGHT TO DIRECT THE USE OF CULVERT END WALL TYPE.
3. THIS IS A TYPICAL CROSSING PLAN. SLIGHT VARIATIONS MAY OCCUR AFTER INSPECTION AND APPROVAL OF LOCATION BY COUNCIL.
4. PRIOR TO THE CONSTRUCTION, THE CROSSING LOCATION SHALL BE APPROVED BY COUNCIL.
5. ALL WORKS TO BE COMPLETED TO THE SATISFACTION OF COUNCIL.
6. MAINTENANCE OF THE CROSSOVER REMAINS THE RESPONSIBILITY OF THE LAND OWNER.
7. INSTALL LOW PROFILE HEAD WALLS OUTSIDE CLEAR ZONE & DRIVEABLE END WALLS WITHIN CLEAR ZONE. NO CULVERT TO BE WITHIN 3m OF EDGE OF SEAL.
8. THE CLEAR ZONE TABLE SHOWN IS A GUIDE ONLY AND FOR FURTHER ACCURATE CLEAR ZONE GUIDELINES REFER TO AUSTRROADS 'GUIDE TO ROAD DESIGN - PART 6: ROADSIDE DESIGN, SAFETY AND BARRIERS' TABLE 4.1: 'CLEAR ZONES DISTANCES FROM EDGE OF THROUGH TRAVELLED WAY'.
9. DRIVEABLE ENDWALLS TO BE USED INSIDE CLEARZONE.
10. TABLE DRAINS ARE NOT TO BE CLOSER THAN 1.0m FROM FENCE LINES OR SERVICES.
11. COUNCIL MAY REQUIRE THAT CROSSING PAVEMENT BE SEALED DEPENDING ON SITE LOCATION AND SPECIFICS.
12. GATE OFFSET DIMENSIONS:

STANDARD VEHICLE TYPE	MINIMUM GATE OFFSET FROM EDGE OF THROUGH LANE (m)
CAR (5.0m)	8.2
RIGID TRUCK (12.0m)	12.5
SEMI (19.0m)	22
B-DOUBLE (25.0m)	28